
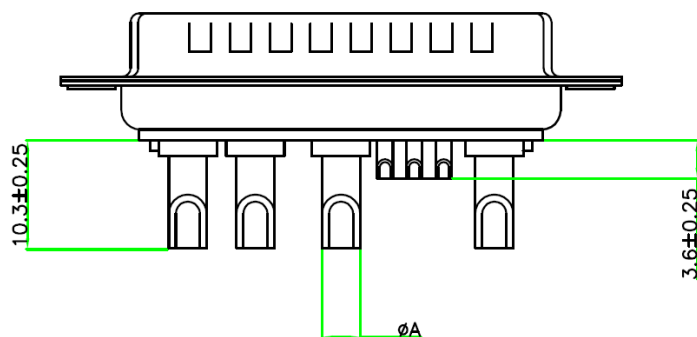
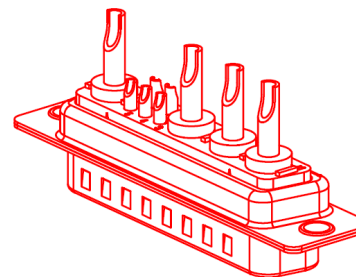



REV.	ECN. NO.	APPD.
A	WL-20-008	Jerry. Zhang

PO(X)	A	B	WIRE	CURRENT RATING (A)
1	2.5	4.5	12#	10
2	3.6	5.0	10#	20
3	4.4	5.5	8#	30
4	5.5	5.5	6#	40

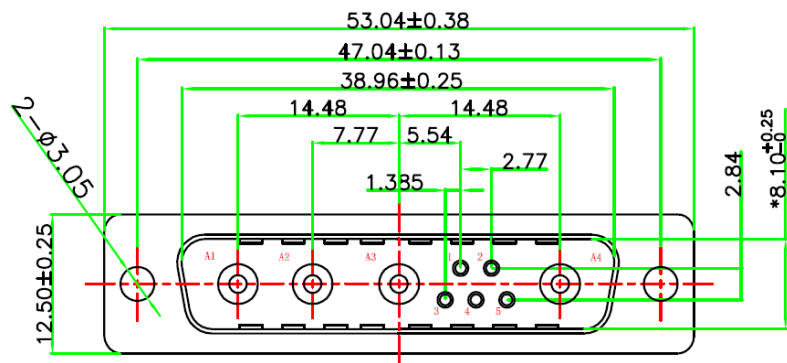

**MATERIALS AND FINISH**

SHELL:STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.

CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.

HIGHT POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.

CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.

**ELECTRICAL CHARACTERISTICS**

HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.

CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :3.0 AMPS.

THE WORKING VOLTAGE:300V.

HIGH POWER CONTECT RESISTANCE:2.7 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.

INSULATION RESISTANCE:2000 MEGAOHMS MIN.

TEMPERATURE RATING:-55° ~+125° .

X.±	X'±	UNITS	mm	NAME(INTENDED USE)				
.X± 0.3	.X'±	MAT'L		9W4 公 电流焊线式传统铆合 20A				
.XX± 0.20	.XX'±	SEE NOTES		PART NO.(INTENDED USE)	CLASS: <input type="checkbox"/> CONFIDENTIAL <input type="checkbox"/> SECRET <input checked="" type="checkbox"/> GENERAL			
.XXX±	.XXX'±	FINISH		WL11-0401	TITLE: CONN DRAWING			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INCEL INTERCONNECT TECHNOLOGY LIMITED, AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF INCEL INTERCONNECT TECHNOLOGY LIMITED.				APPD: yuan. wu 08/16"20	DWG NO.: WL11-0401-0566			
				Q'TY	CHKD: lei. wang 08/16"20	SCALE	SHEET	REV.
					DRAW: min. sun 08/16"20	N/A	1/1	A